

Serie SPABP




Caratteristiche costruttive



AISI 304
AISI 316 optional



Finitura esterna fioretata o satinata
External marbled or satin polished
Finition extérieure bouchonnée ou brossée




Saldature TIG decapate e spazzolate
TIG welding pickled and passivated
Nettoyage mécanique de soudures TIG



Fondo bombato
Roundly bottom
Fond bombé

Caratteristiche tecniche

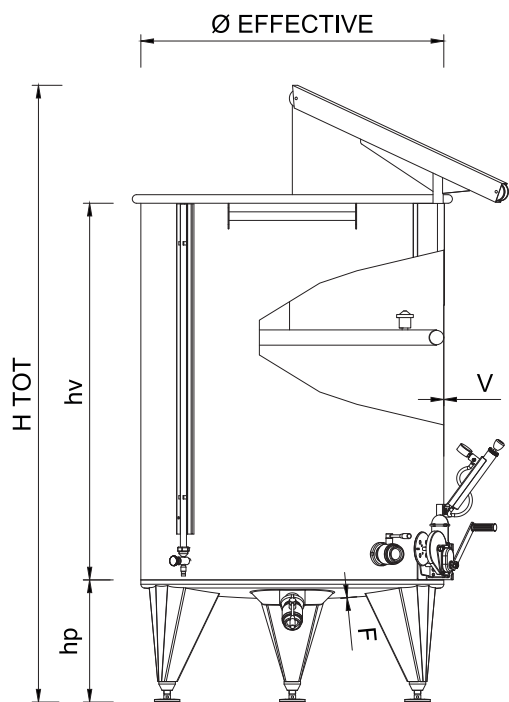

| Code Tank | Capacity LT | Ø Effective mm | HV mm | P | | H mm | H TOT mm | F mm | V mm |
|-----------|-------------|----------------|-------|----|-----|------|----------|------|------|
| | | | | n° | hp | | | | |
| 300 | 313 | 650 | 1000 | 3 | 330 | 1330 | — | 1,5 | 0,7 |
| 400A | 424 | 650 | 1300 | 3 | 330 | 1630 | — | 1,5 | 0,7 |
| 400B | 416 | 790 | 900 | 3 | 400 | 1300 | — | 1,5 | 0,7 |
| 500 | 514 | 790 | 1100 | 3 | 400 | 1500 | — | 1,5 | 0,7 |
| 600 | 612 | 790 | 1300 | 3 | 400 | 1700 | — | 1,5 | 0,8 |
| 700 | 710 | 790 | 1500 | 3 | 400 | 1900 | — | 1,5 | 0,8 |
| 750 | 743 | 1000 | 1000 | 3 | 400 | 1400 | — | 1,5 | 0,8 |
| 1000 | 979 | 1000 | 1300 | 3 | 400 | 1700 | — | 1,5 | 0,8 |
| 1500 | 1528 | 1000 | 2000 | 3 | 400 | 2400 | 2830 | 1,5 | 1 |
| 2000 | 1921 | 1000 | 2500 | 3 | 400 | 2900 | 3330 | 1,5 | 1 |
| 1600 | 1615 | 1190 | 1500 | 3 | 400 | 1900 | 2350 | 1,5 | 1 |
| 2150 | 2171 | 1190 | 2000 | 3 | 400 | 2400 | 2850 | 1,5 | 1 |
| 2800 | 2728 | 1190 | 2500 | 3 | 400 | 2900 | 3350 | 1,5 | 1 |
| 3400 | 3284 | 1190 | 3000 | 3 | 400 | 3400 | 3850 | 1,5 | 1 |

Optionals



Piedi regolabili
Adjustable feet
Pieds réglables



Valvole e rubinetteria inox
S/S valves and taps
Valves et robinets inox




Portelle
Manholes
Portes



Arganetto
S/S winch
Treuil inox




Termometro
Thermometer
Thermometre



Fasce refrigeranti
Cooling jackets
Chemises de refroidissement



Segnalivello
Level gauge
Regle de niveau



Appoggiascala
Ladder support
Appuie echelle

LISTINO
PRICE LIST
LISTE DE PRIX



Ulteriori optionals e modifiche disponibili su richiesta. - Options and modifications available on request. - Autres options et modifications disponibles sur demande.